
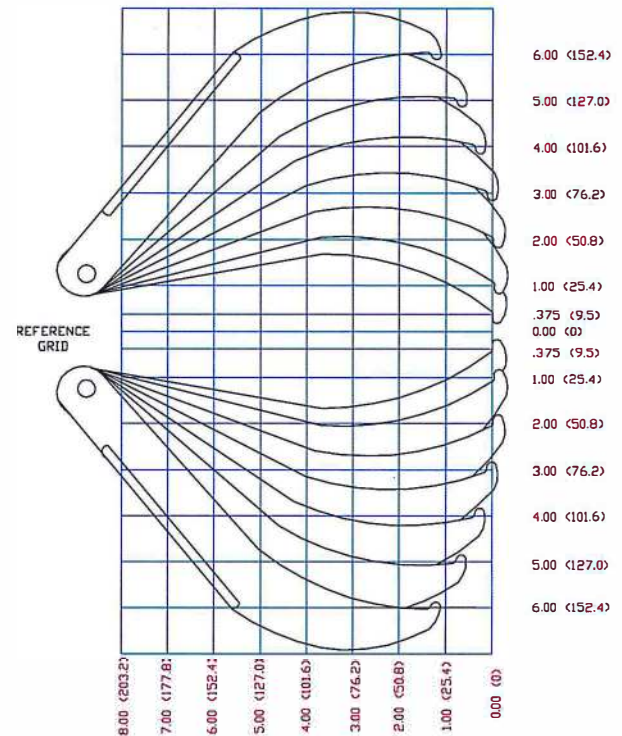


PHB-108/208 Standard Jaws

HYDRAULIC PULLER

Page 1 of 2

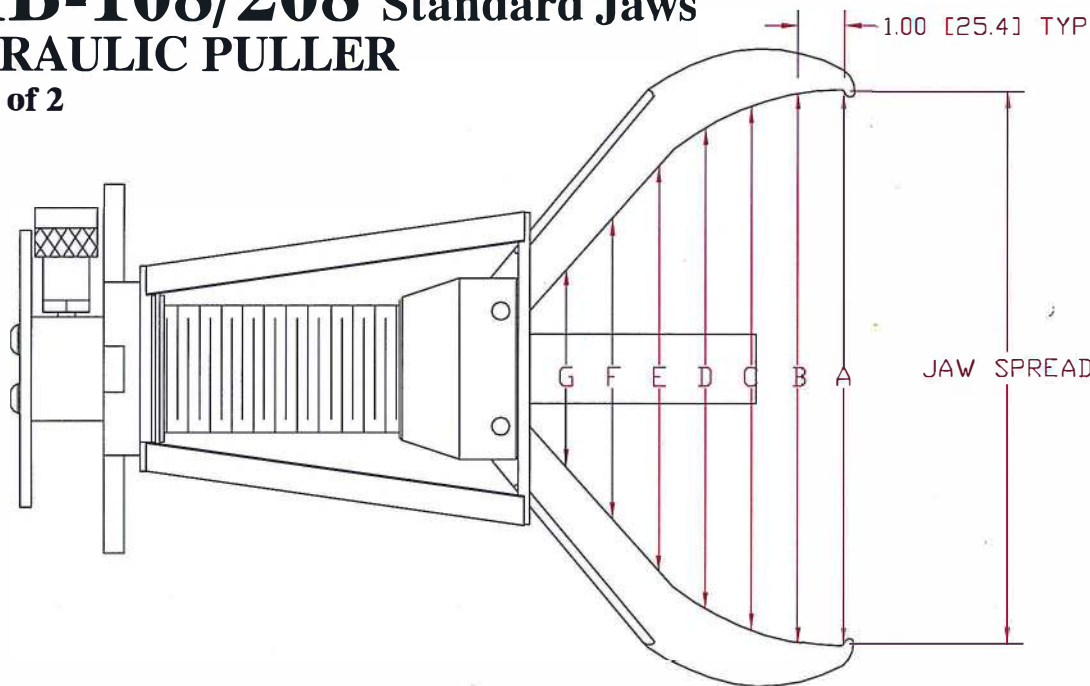

JAW SPREAD	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
0.75 (19.0)	0.99 (25.1)	2.22 (56.3)	2.97 (75.4)	3.33 (84.5)	3.18 (80.7)	2.59 (65.7)
2.00 (50.8)	2.05 (52.1)	3.11 (78.9)	3.74 (94.9)	3.99 (101.3)	3.73 (94.7)	2.90 (73.6)
4.00 (101.6)	4.14 (105.1)	4.87 (123.6)	5.28 (134.1)	5.33 (135.3)	4.89 (124.2)	3.56 (90.4)
6.00 (152.4)	6.10 (154.9)	6.66 (169.1)	6.83 (173.4)	6.65 (168.9)	5.95 (151.1)	4.08 (103.6)
8.00 (203.2)	8.06 (204.7)	8.35 (212.0)	8.30 (210.8)	7.90 (200.6)	6.93 (176.0)	4.47 (113.7)
10.00 (254.0)	10.15 (257.8)	10.18 (258.5)	9.85 (250.1)	9.12 (231.6)	7.71 (195.8)	4.48 (113.7)
12.00 (304.8)	12.21 (310.1)	11.99 (304.5)	11.36 (288.5)	10.29 (261.3)	8.35 (212.0)	4.08 (103.6)

PSI LOCK MODELS PHB108/PHB208

GEAR AND BEARING PULLERS

MODEL PHB108

10 TON (9.3 METRIC TONS)
3 JAW - STANDARD
RAM STROKE 6.13 (155.7)
REACH 8.00 (203.2)
SPREAD .75 TO 12.0 (19 to 304.8)
WT. 16.1 (7.30kg)
RATED FOR 10000 PSI

MODEL PHB208







10 TON (9.3 METRIC TONS)
2 JAW - STANDARD
RAM STROKE 6.13 (155.7)
REACH 8.00 (203.2)
SPREAD .75 TO 12.0 (19 to 304.8)
WT. 14.1 (6.40kg)
RATED FOR 10000 PSI

PHB-108/208 Standard Jaws

HYDRAULIC PULLER


Page 2 of 2

RAM POINT SET

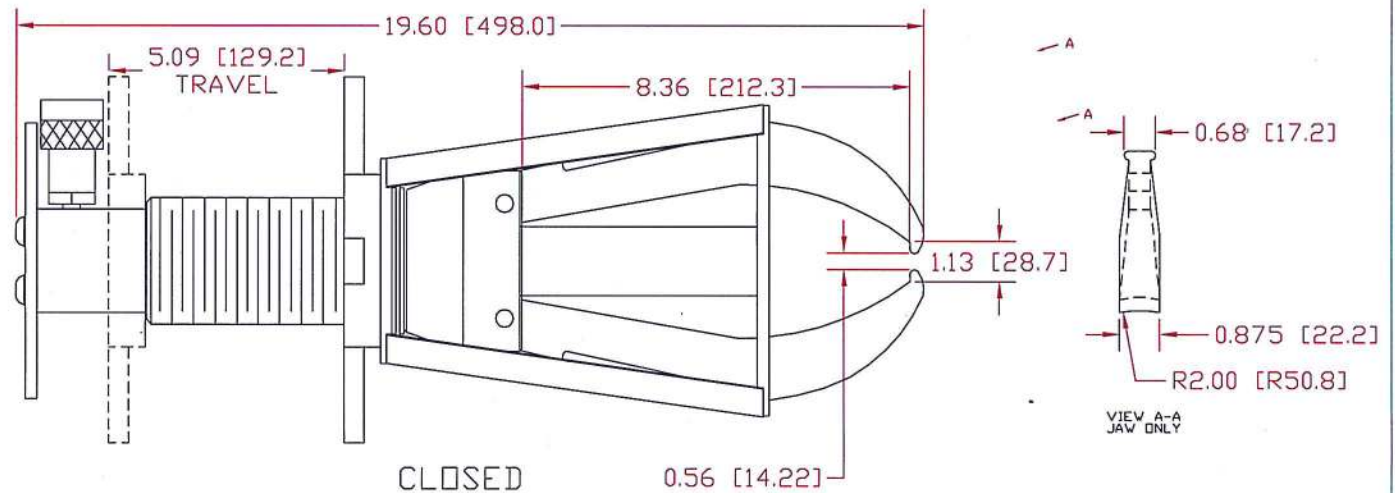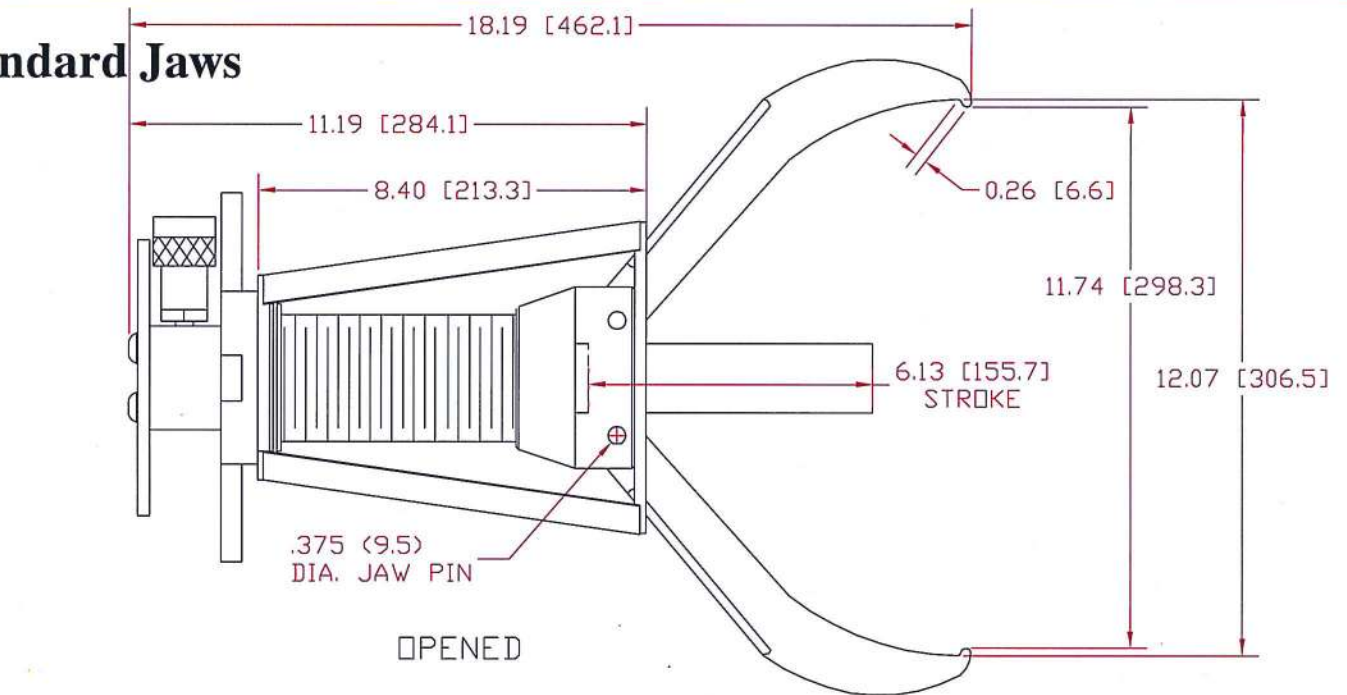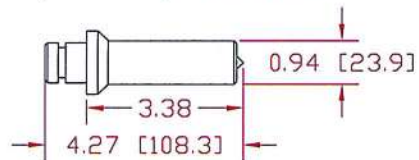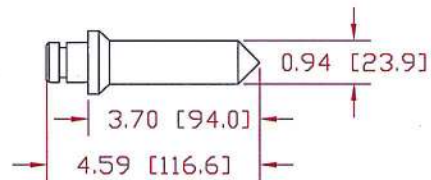


PHB-108/208 Long Jaws HYDRAULIC PULLER

Page 1 of 2

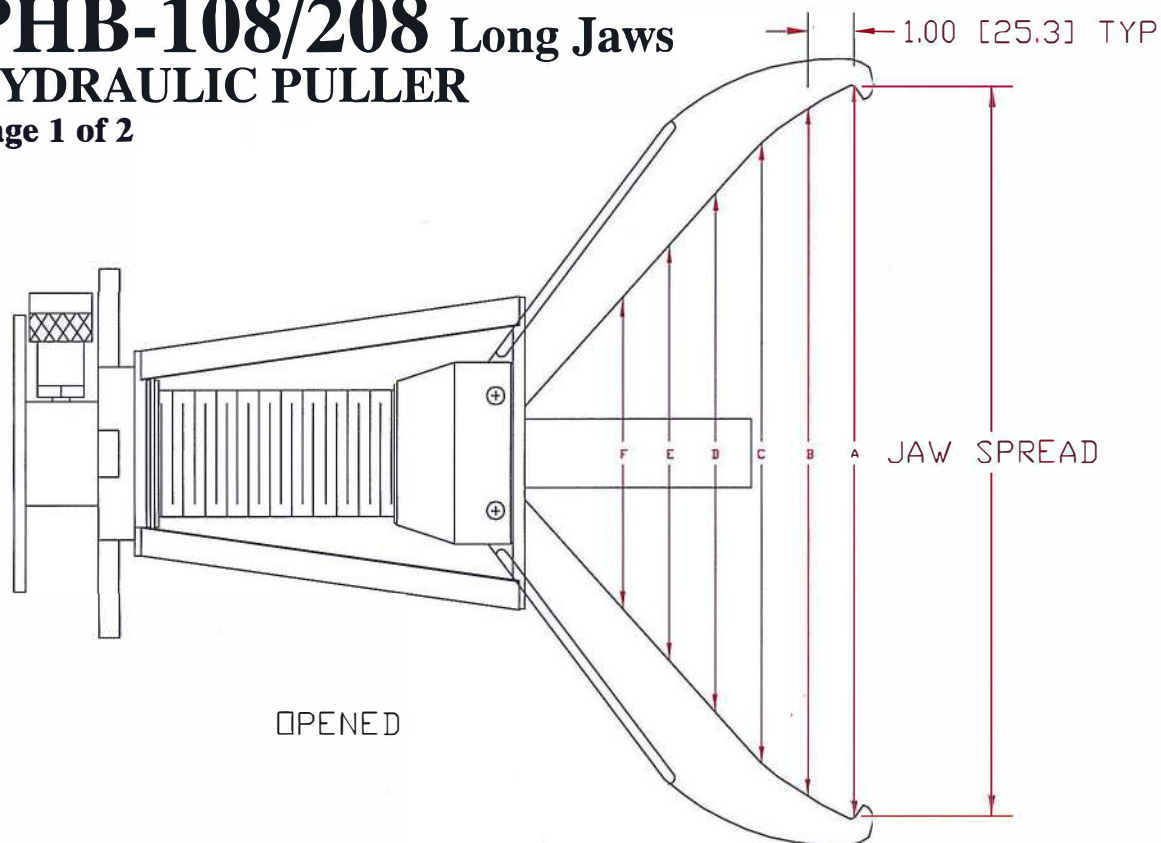

OPENED

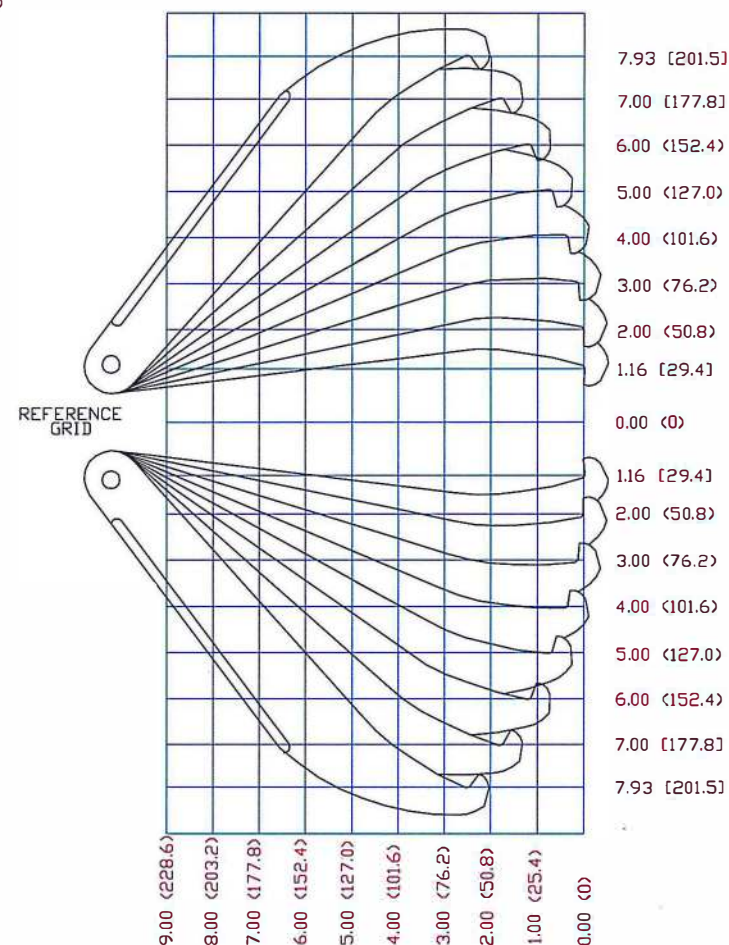

JAW SPREAD	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
2.32 (58.9)	2.91 (73.8)	3.15 (80.0)	3.00 (76.2)	2.75 (69.9)	2.51 (63.7)	2.26 (57.5)
4.00 (101.6)	4.42 (112.2)	4.51 (114.4)	4.21 (106.8)	3.79 (96.3)	3.37 (85.7)	2.96 (75.1)
6.00 (152.4)	6.21 (157.7)	6.10 (155.0)	5.60 (142.2)	4.97 (126.3)	4.35 (110.4)	3.86 (98.1)
8.00 (203.2)	8.01 (203.5)	7.71 (195.9)	6.99 (177.3)	6.12 (155.6)	5.27 (133.8)	4.41 (112.1)
10.00 (254.0)	9.80 (248.9)	9.27 (235.4)	8.27 (210.2)	7.16 (182.0)	6.03 (153.1)	4.95 (125.6)
12.00 (304.8)	11.57 (293.9)	10.79 (274.0)	9.48 (240.8)	8.07 (205.0)	6.66 (169.1)	5.25 (133.3)
14.00 (355.6)	13.33 (338.5)	12.24 (310.9)	10.53 (267.5)	8.75 (222.1)	6.69 (176.8)	5.17 (131.4)
15.86 (402.8)	14.91 (378.8)	13.45 (341.7)	11.24 (285.5)	8.99 (228.4)	6.74 (171.2)	4.49 (114.1)

POSI LOCK MODELS PHB108/PHB208 GEAR AND BEARING PULLERS

MODEL PHB108

10 TON (9.3 METRIC TONS)
3 JAW - LONG JAWS
RAM STROKE 6.13 (155.7)
REACH 9.67 (245)
SPREAD 2.32 to 15.86 (58.9 to 402.8)
WT. 17.6 (7.99kg)
RATED FOR 10000 PSI







MODEL PHB208

10 TON (9.3 METRIC TONS)
2 JAW - LONG JAWS
RAM STROKE 6.0 (152.4)
REACH 9.67 (245)
SPREAD 2.32 to 15.86 (58.9 to 402.8)
WT. 15.1 (6.85kg)
RATED FOR 10000 PSI

PHB-108/208 Long Jaws HYDRAULIC PULLER

Page 2 of 2

RAM POINT
SET

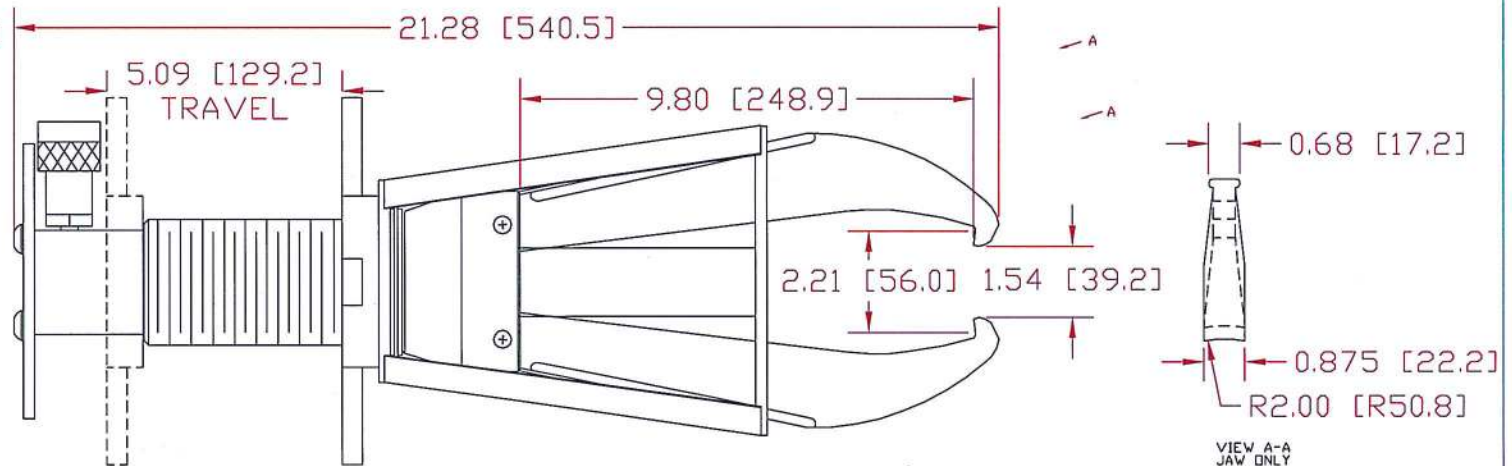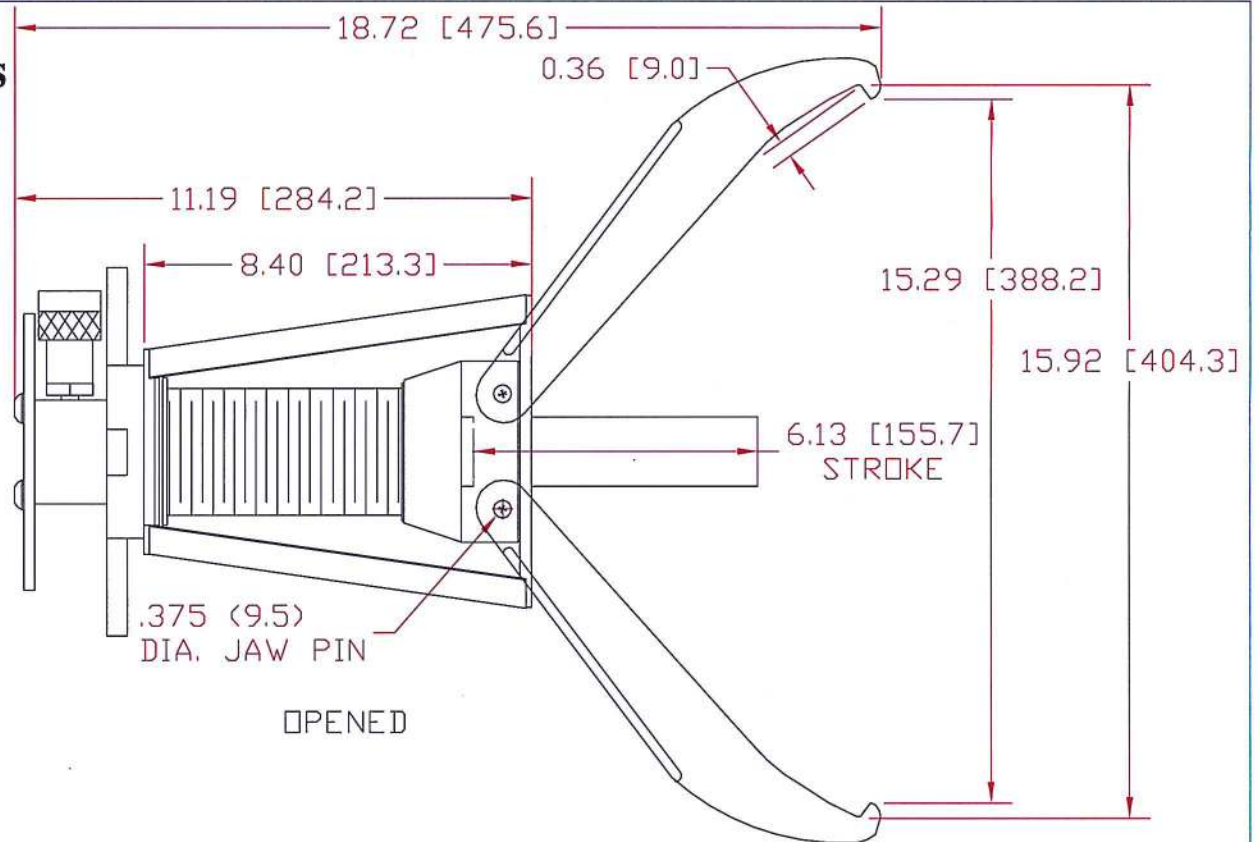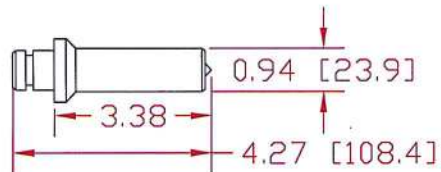
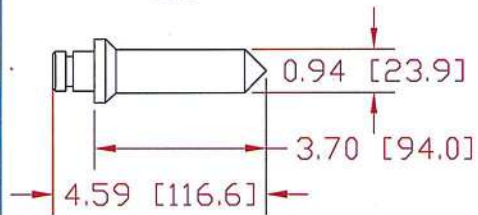


CLOSED

VIEW A-A
JAW ONLY

PHB-108/208 Extra Long Jaws HYDRAULIC PULLER

Page 1 of 2

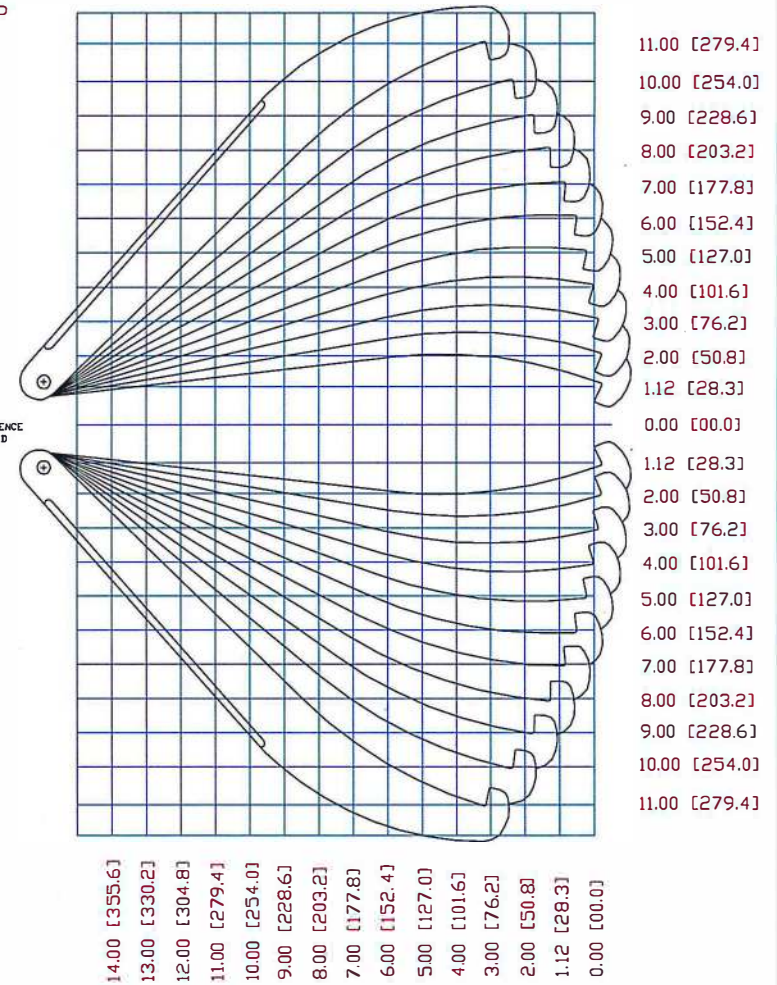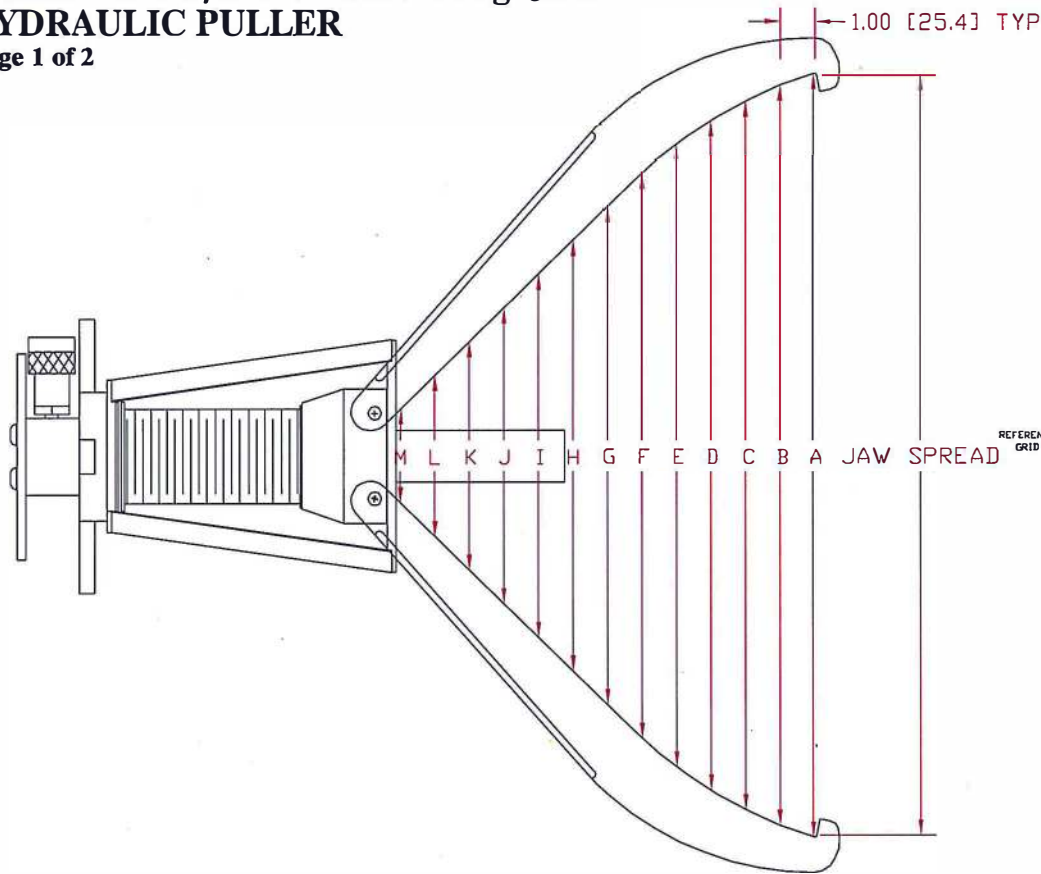

JAW SPREAD	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM J	DIM K	DIM L	DIM M
1.12 [28.4]	2.52 [64.0]	2.69 [68.3]	3.62 [91.9]	3.92 [99.6]	4.03 [102.4]	4.00 [101.6]	3.89 [98.8]	3.66 [93.0]	3.43 [87.1]	3.21 [81.5]	2.98 [75.7]	2.75 [69.9]
2.00 [50.8]	4.25 [108.0]	4.77 [121.2]	5.13 [130.3]	5.33 [135.4]	5.37 [138.4]	5.26 [133.8]	5.00 [127.0]	4.66 [118.4]	4.32 [109.7]	3.98 [101.1]	3.64 [92.5]	3.30 [83.8]
3.00 [76.2]	6.20 [157.5]	6.59 [167.4]	6.83 [173.5]	6.92 [175.8]	6.85 [174.0]	6.63 [168.4]	6.25 [158.8]	5.78 [146.8]	5.31 [134.9]	4.84 [122.9]	4.37 [111.0]	3.90 [99.1]
4.00 [101.6]	8.16 [207.3]	8.45 [214.6]	8.57 [217.7]	8.54 [216.9]	8.35 [212.1]	8.00 [203.2]	7.50 [190.5]	6.89 [175.0]	6.29 [159.8]	5.69 [144.5]	5.08 [129.0]	4.48 [113.8]
5.00 [127.0]	10.15 [257.8]	10.30 [261.6]	10.30 [261.6]	10.15 [257.8]	9.84 [249.9]	9.37 [238.0]	8.72 [221.5]	7.98 [202.7]	7.23 [183.6]	6.49 [164.8]	5.75 [146.1]	5.00 [127.0]
6.00 [152.4]	12.15 [308.6]	12.18 [309.4]	12.03 [305.6]	11.78 [299.2]	11.34 [288.0]	10.74 [272.8]	9.93 [252.2]	9.04 [229.6]	8.15 [207.0]	7.25 [184.2]	6.36 [161.5]	5.46 [138.7]
7.00 [177.8]	14.11 [358.4]	14.00 [355.6]	13.77 [349.8]	13.36 [339.3]	12.78 [324.6]	12.00 [304.8]	11.08 [281.4]	10.01 [254.3]	9.95 [252.7]	7.90 [200.7]	6.84 [173.7]	5.79 [147.1]
8.00 [203.2]	16.12 [409.4]	15.88 [403.4]	15.49 [393.4]	14.93 [379.2]	14.18 [360.4]	13.25 [336.6]	12.11 [307.6]	10.87 [276.1]	9.64 [244.9]	8.41 [213.6]	7.17 [182.1]	5.94 [150.9]
9.00 [228.6]	18.03 [458.0]	17.69 [449.3]	17.15 [435.6]	16.44 [417.6]	15.53 [394.5]	14.40 [365.8]	13.04 [331.2]	11.61 [294.9]	10.18 [258.6]	8.75 [222.3]	7.32 [185.9]	5.90 [149.9]
10.00 [254.0]	20.09 [510.3]	19.56 [496.8]	18.86 [479.0]	17.98 [456.7]	16.85 [428.0]	15.49 [393.4]	13.87 [352.3]	12.20 [309.9]	10.54 [267.7]	8.88 [225.6]	7.22 [183.4]	5.56 [141.2]
11.11 [282.2]	22.30 [566.4]	21.59 [548.4]	20.68 [525.3]	19.56 [496.8]	18.18 [461.8]	16.49 [418.8]	14.54 [369.3]	12.57 [319.3]	10.60 [269.2]	8.63 [219.2]	6.66 [169.2]	4.69 [119.1]

POSI LOCK MODELS PHB108/PHB208 GEAR AND BEARING PULLERS

MODEL PHB108

10 TON (9.3 METRIC TONS)
3 JAW - EXTRA LONG JAWS
RAM STROKE 6.13 (155.7)
REACH 16.00 (406)
SPREAD 1.5 TO 12 (19 TO 304.8)
WT. 24.2 (10.98kg)
RATED FOR 10000 PSI

MODEL PHB208

10 TON (9.3 METRIC TONS)
2 JAW - EXTRA LONG JAWS
RAM STROKE 6.13 (155.7)
REACH 16.00 (406)
SPREAD .75 TO 12 (19 TO 304.8)
WT. 19.5 (8.85kg)
RATED FOR 10000 PSI

PHB-108/208 Extra Long Jaws HYDRAULIC PULLER

Page 2 of 2

